


6000 W x 1 W, PF, ACV, ACA, Signal phase

WATT METER

Model : DW-6163

ISO-9001, CE, IEC1010

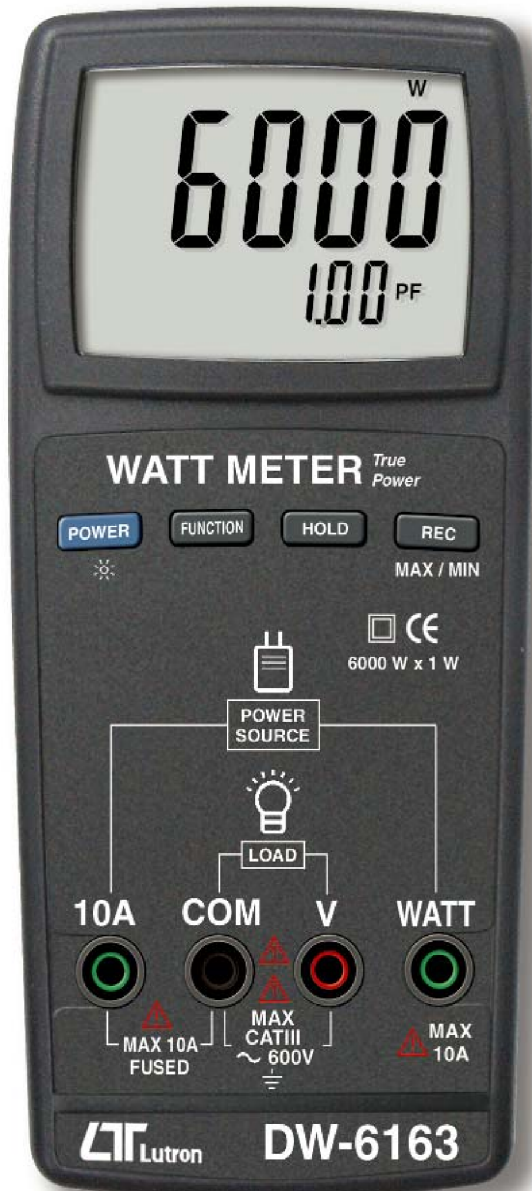

FEATURES :

- * True power measurement.
- * True rms measurement for ACV, AC
- * Watt : 0 to 6000 W x 1 W
- * Power factor : 0.01 to 1.00 x 0.01 P
- * ACV : 0 to 600 V X 0.1 V.
- * ACA : 0 to 10.00 A x 0.01 A.
- * ACV input impedance : 10 Mega OH
- * Data Hold, Record (Max., Min.).
- * RS232/USB Computer interface.
- * Optional data Acquisition software, SW-U801-WIN, SW-E802.
- * Optional USB cable, USB-01.
- * Optional SD acard data logger, DL-9602SD.



Elma Instruments A/S
Ryttermarken 2
DK-3520 Farum
T: +45 7022 1000
F: +45 7022 1001
info@elma.dk
www.elma.dk

Elma Instruments AS
Garver Ytteborgsvei 83
N-0977 Oslo
T: +47 22 10 42 70
F: +47 22 21 62 00
firma@elma-instruments.no
www.elma-instruments.no

Elma Instruments AB
Pepparvägen 27
S-123 56 Farsta
T: +46 (0)8-447 57 70
F: +46 (0)8-447 57 79
info@elma-instruments.se
www.elma-instruments.se



6000 W x 1 W, PF, ACV, ACA

WATT METER

Model : DW-6163

FEATURES

- * Professional precision WATT meter with 1 W resolution digital display , battery operated.
- * LSI - circuit provides high reliability and durability.
- * Directly operation.
- * Measurement :
WATT (AC) : 6000W x 1W.
ACV : 600V x 0.1 V .
ACA : 10 A x 10 m A .
PF : 1.00 x 0.01
- * True Power and Wide range 0 W to 6000 Watt.
- * True RMS measurement of ACV / ACA.
- * Super large LCD , Dual display at same time.
- * Full function Auto range.
- * Memory Record (Max. , Min.) , Data Hold.
- * RS232 / USB Computer interface.
- * Built-in low battery indicator.
- * Built - in backlight easy to readout.
- * Power : DC 9V (006P) or AC to DC 9V adapter in.

GENERAL SPECIFICATIONS

Circuit	Custom one-chip of microprocessor LSI circuit.
Display	Large LCD display max. reading 9999. Digit size : 21.8 x 8.5 mm. Dual value display with backlight
Measurement Unit	ACV 0 to 600.0 V ACA 0.01 to 10.00 A WATT 0 to 6000 W PF 0.01 to 1.00
Over input	" ---- " mark indication .
Zero	Automatic adjustment
Sampling Time	Approx. 1 second .
Data Hold	Freeze the display reading .
Memory Recall	Maximum & Minimum value .
Data output	RS232 / USB PC Computer interface. * Connect the optional RS232 cable UPCB - 02 will get the RS232 plug. * Connect the optional USB cable USB - 01 will get the USB plug.
Operation Temperature	0°C to 50°C (32°F to 122°F).
Operation Humidity	Less than 80% RH
Power Supply	Alkaline or Heavy duty type DC 9V battery 006P , MN1604 (PP3) or equivalent.
Power Consumption	Approx. DC 10 mA

Weight	398 g/0.88 LB
Dimension	190 x 88 x 40 mm (7.5 x 3.5 x 1.6 inch).
Accessories Included	Instruction manual..... 1 PC Test lead (Red & Black)..... 1 Pair
Optional	AC TO DC 9V adapter Holster. HS-03 SD card DATA LOGGER, DL-9602SD
Accessories	USB cable , USB - 01 Data Acquisition software, SW-U801-WIN Excel Data Acquisition software, SW-E802 SD card data logger, DL-9602SD

ELECTRICAL SPECIFICATIONS (23± 5 °C)

WATT (TRUE POWER)

Range	Resolution	Accuracy
6000 W	1 W	± (1%+ 5 W)
* Auto range.		
* Measuring Signal come from the front LOAD plug terminals.		
* Accuracy is test under input signal is sine wave , 50 / 60 Hz.		
* ACV ACA frequency response is from 40 to 400 Hz.		
* Max. input value, AC voltage : 600V, AC current : 10 A.		
* Accuracy @ 23°C ± 5°C.		

V/A (TRUE RMS)

Range	Resolution	Accuracy
ACV 600 V	0.1 V	± (0.3 % + 0.3 V)
ACA 10 A	0.01 A	± (0.3 % + 0.03 A)
* Auto range.		
* ACV, ACA accuracy is test under input signal is sine wave, 50/ 60 Hz.		
* ACV ACA frequency response is from 40 to 400 Hz.		
* Max. input value, AC voltage : 600V, AC current : 10 A.		
* Accuracy @ 23°C ± 5°C		

PF (Power factor)

Range	Resolution	Accuracy
1.00	0.01	± (1 % + 2d)
* ACV, ACA accuracy is test under input signal is sine wave, 50/ 60 Hz		
* ACV ACA frequency response is from 40 to 400 Hz.		
* Max. input value, AC voltage : 600V, AC current : 10 A.		
* Accuracy @ 23°C ± 5°C		

* Appearance and specifications listed in this brochure are subject to change without notice.

1403-DW6163