



Flooring HygroStick BLD4755



Protimeter Flooring HygroStick BLD4755 is used with Protimeter Flooring Kits to measure and monitor concrete moisture. These probes are installed into a sleeve fixed in concrete and, with the attached cable, measure moisture and Relative Humidity (RH) with Protimeter devices.

Specifications

Accuracy %RH:

30% to 40% RH, $\pm 3\%$ RH at 68°F (20°C)

41% to 98% RH, $\pm 2\%$ RH at 68°F (20°C)

Temperature Range:

32°F to 122°F (0°C to 50°C) $\pm 0.6^\circ\text{F}$ ($\pm 0.3^\circ\text{C}$)

Operating Environment:

Temperature – 0°C to 80°C

Humidity – 0 to 90% RH, non-condensing

Regulatory Compliance:

CE, RoHS, ETL

Probe Care


- Avoid placing the probe in liquids
- Always store in a dry, dust-free environment
- Avoid touching the measuring element
- Only use with recommended Protimeter devices

For use with:

BLD8800 – Protimeter MMS2

BLD7750 – HygroMaster2

Probe Dimensions

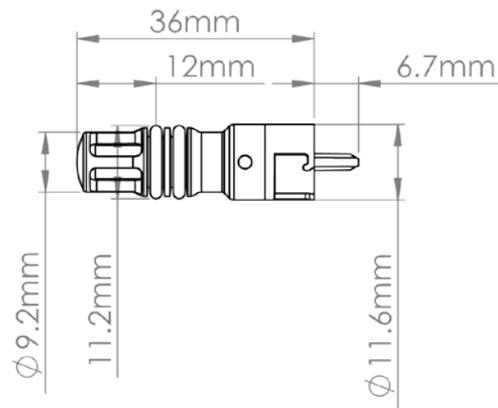

Amphenol
Advanced Sensors

www.protimeter.com

www.amphenol-sensors.com

© 2017 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-704A - 11/2017